



1748-NA2
Cable tie mounts - two-way, UV resistant

Material: polyamide PA 6.6
 Self-extinguishing class: UL 94-V2
 Working temperature: -40 °C ÷ +85 °C
 Minimum installation temperature: -10 °C
 Resistance to chemicals: Good resistance to bases, oils, greases, chloride solvents. Limited resistance to acids. Not resistant to phenols

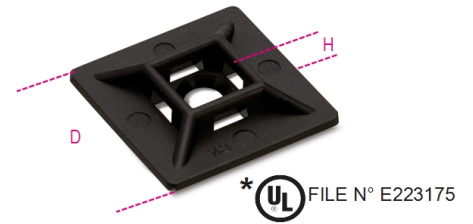

		art.	SxDxH mm	F mm	tipo	
		BMN0901	BMN0901	19x19x5.4	3.6	adesivo
*		BMN0902	BMN0902	28x28x7	4.8	adesivo
*		BMN0903	BMN0903	28x28x5.8	4.8	a vite