


669N

Click-type torque bars, rectangular drive, for right-hand and left-hand tightening, torque accuracy: $\pm 3\%$

UNI EN ISO 6789

- scale increased by 60% for improved visibility and setting accuracy
- torque adjusting speed increased by 40%
- handle and lens materials resistant to all chemical substances used in automotive sector, industry and aviation
- red colour of o-ring indicates that wrench is unlocked and torque can be adjusted
- when not in use, set torque to lowest value of torque wrench range
- recalibration reminder shows time to recalibrate wrench (4 steps: 3, 6, 9 and 12 months)

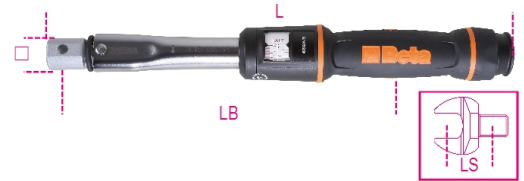

Nm
Kgfm
lbf.ft



mm
L
mm
LB
mm
LS
mm

| g | art. | Nm | Kgfm | lbf.ft | □ mm | L mm | LB mm | LS mm | g |
|-----------|----------|--------|---------|--------|---------|---------|----------|----------|------|
| 006690202 | 669N/2 | 5÷25 | 0,5÷2,5 | 4÷18 | 9x12 | 215 | 140 | 28,8 | 300 |
| 006690205 | 669N/5 | 10÷50 | 1÷5 | 7÷37 | 9x12 | 307 | 226,8 | 28,8 | 590 |
| 006690210 | 669N/10 | 20÷100 | 2÷10 | 15÷75 | 9x12 | 376 | 266,8 | 28,8 | 670 |
| 006690220 | 669N/20 | 40÷200 | 4÷20 | 30÷150 | 9x12 | 450 | 345,6 | 28,8 | 795 |
| 006690221 | 669N/20X | 40÷200 | 4÷20 | 30÷150 | 14x18 | 450 | 351 | 39,8 | 795 |
| 006690230 | 669N/30 | 60÷300 | 6÷30 | 50÷220 | 14x18 | 588 | 468,5 | 39,8 | 1230 |
| 006690240 | 669N/40 | 80÷400 | 8÷40 | 60÷295 | 14x18 | 664 | 563 | 39,8 | 2100 |