

**8029R**
**Bow shackles with screw collar pins, high-tensile alloy steel, GRADE 6, hot-dipped galvanized body**

CE

**EN 13889**
**TECHNICAL DATA**


- minimum safety factor: 6
- heat treatment: hardening and tempering
- traceability code on pin and body

**LABORATORY TESTS**

- chemical analysis
- metallographic analysis
- tensile test
- fatigue test (min. 20,000 cycles)
- proof load test (2 x WLL)

**AVAILABLE CERTIFICATES**

- Technical Product Specifications
- Test Report UNI EN10204 type 2.2
- Inspection Certificate UNI EN10204 type 3.1
- CE Declaration of Conformity

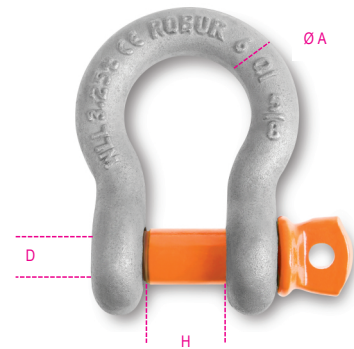

art.	art.	ØD mm	ØA mm	H mm	WLL kg
080290106	8029R	8	6	13	500
080290108	8029R	10	8	13,5	750
080290110	8029R	11	10	17	1000
080290111	8029R	13	11	18,5	1500
080290112	8029R	16	13	20,5	2000
080290116	8029R	19	16	27	3250
080290120	8029R	22	19	32	4750
080290122	8029R	25	22	37	6500
080290124	8029R	28	26	43,5	8500
080290128	8029R	32	29	48	9500
080290132	8029R	35	32	53	12000
080290135	8029R	38	35	59	13500
080290138	8029R	42	38	62	17000
080290145	8029R	50	45	75	25000
080290150	8029R	57	50	83	35000
080290157	8029R	65	57	95	42500
080290165	8029R	70	65	105	55000