

8086
lifting master link assemblies alloy steel, painted

CE

EN 1677-4

* WLL means the use with 3 or 4 chain slings and β angle $< 45^\circ$.

TECHNICAL DATA

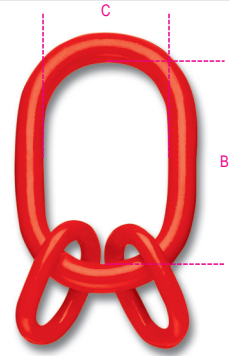
- safety factor: 4
- heat treatment: hardening and tempering
- traceability code



LABORATORY TESTS

- chemical analysis, metallographic analysis
- proof load test (WLL x 2.5)
- tensile test
- fatigue test (min. 20,000 cycles)

AVAILABLE CERTIFICATES

- Technical product specifications
- Test report UNI EN10204 type 2.2
- Inspection certificate UNI EN10204 type 3.1
- CE Declaration of Conformity



		art.	WLL kg	 Ø mm	B mm	C mm
*	080860021	8086 3,15	3150	7	135	75
	080860042	8086 4,25	4250	8	160	90
	080860067	8086 6,7	6700	10	180	100
	080860100	8086 11,2	11200	13	200	110
	080860117	8086 17,0	17000	16	260	140