

TECHNICAL DATA

- safety factor: 4
- heat treatment: hardening and tempering

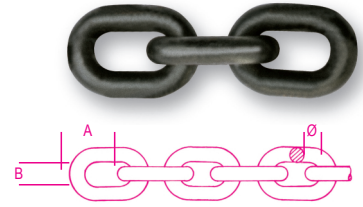
• traceability code


LABORATORY TESTS


- chemical analysis
- metallographic analysis
- tensile test

AVAILABLE CERTIFICATES

- Technical Product Specifications
- Test Report UNI EN10204 type 2.2
- Manufacturer's Certificate EN818-2
- CE Declaration of Conformity


WLL Ton UNI EN 818

D mm			
	$0^\circ < \alpha \leq 45^\circ$	$45^\circ < \alpha \leq 60^\circ$	
7	1,5	2,12	1,5
8	2	2,8	2
10	3,15	4,25	3,15
13	5,3	7,5	5,3

D mm		
	$0^\circ < \alpha \leq 45^\circ$	$45^\circ < \alpha \leq 60^\circ$
7	3,15	2,28
8	4,25	3
10	6,7	4,75
13	11,2	8

art.	WLL kg				
081000011	8100 1,12	1120	18	7,8	6
081000016	8100 1,5	1500	21	11,0	7
081000020	8100 2,0	2000	24	12,0	8
081000032	8100 3,15	3150	30	14,5	10
081000053	8100 5,3	5300	39	20,0	13
081000080	8100 8,0	8000	48	20,8	16