

**8026A**
**lifting DEE shackles, hot forged carbon steel, UNI 1947 type A, galvanized**

CE

**GRADO 4**
**TECHNICAL DATA**


- safety factor: 5
- heat treatment: normalizing
- traceability code


**LABORATORY TESTS**

- chemical analysis
- metallographic analysis
- tensile test

**AVAILABLE CERTIFICATES**

- Technical product specifications
- Test report UNI EN10204 type 2.2
- Inspection certificate UNI EN10204 type 3.1
- CE Declaration of Conformity

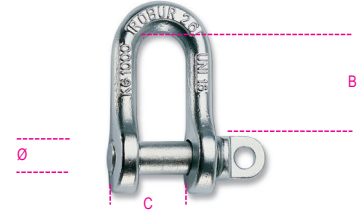

|  | art.     | Ø<br>mm | ≈<br>" | WLL<br>kg | B x C<br>mm |
|---|----------|---------|--------|-----------|-------------|
| 080260012   | 8026A 12 | 12      | 1/2    | 630       | 42x20       |
| 080260014   | 8026A 14 | 14      | 9/16   | 800       | 46x22       |
| 080260016   | 8026A 16 | 16      | 5/8    | 1000      | 50x24       |
| 080260018   | 8026A 18 | 18      | 11/16  | 1300      | 54x26       |
| 080260020   | 8026A 20 | 20      | 3/4    | 1600      | 58x28       |
| 080260022   | 8026A 22 | 22      | 7/8    | 2000      | 69x32       |
| 080260025   | 8026A 25 | 25      | 1"     | 2500      | 79x36       |
| 080260028   | 8026A 28 | 28      | 1.1/8  | 3150      | 90x40       |
| 080260032   | 8026A 32 | 32      | 1.1/4  | 4000      | 100x45      |
| 080260036   | 8026A 36 | 36      | 1.3/8  | 5000      | 110x50      |
| 080260040   | 8026A 40 | 40      | 1.9/16 | 6300      | 120x55      |
| 080260042   | 8026A 42 | 42      | 1.5/8  | 8000      | 131x60      |
| 080260045   | 8026A 45 | 45      | 1.3/4  | 10000     | 143x65      |
| 080260050   | 8026A 50 | 50      | 2"     | 12500     | 155x70      |